

# Type CWBA

## Belt Drive Centrifugal

### Wall Exhaust Fans



#### AMERICAN COOLAIR CORPORATION

P.O. Box 2300 Jacksonville, Florida 32203  
 Phone: (904) 389-3646  
 Fax: (904) 387-3449 • (904) 381-7560  
 E-mail: fans@coolair.com  
 Internet: www.coolair.com


#### Standard Fan Features

- Non-overloading aluminum wheel with "C-Drive" computer balanced.
- Force ventilated motor compartment isolated from airstream.
- Variable pitch motor pulley.
- Vibration isolators on drive frame.
- Weatherproof spun aluminum housing.
- NEMA Standard frame size motors.
- Overlapping wheel/inlet venturi.
- "C-Drive" engineered to provide 1,000,000 hours L10 bearing life.
- AMCA label for air and sound.
- Polypropylene birdscreen.

#### Optional Features

- UL Label for Standard 705.
- Safety disconnect switch.
- Backdraft damper.
- Wall mounting flange.
- Epoxy coating.

Check here for UL 705

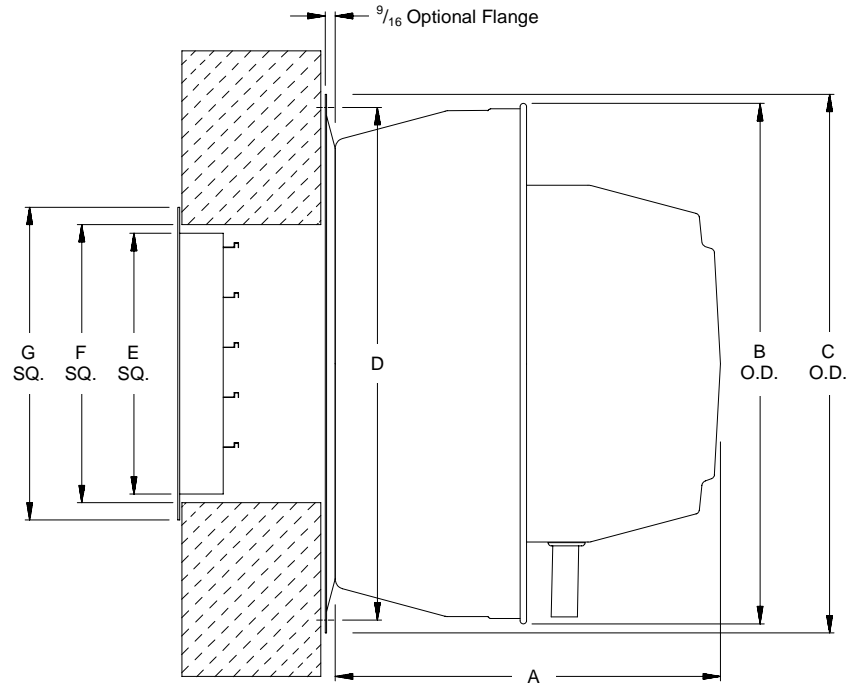

Size	Ventilator Dimensions				Damper Dimensions		
	A	B	C	D	E	F	G
12-15	22 1/8	29 7/8	31	29 1/2	15	15 3/4	17 1/2
16-20	24 3/8	35 7/8	36	34 1/2	22	22 3/4	24 1/2

Dimensions in inches

### Specifications

		FAN DATA					MOTOR DATA						
FAN NO.	QTY.	MODEL NO.	CFM	SP	RPM	SONES	HP	RPM	VOLTAGE	PH	HZ	ENCLOSURE	ACCESSORIES AND REMARKS

PROJECT \_\_\_\_\_ ENGINEER \_\_\_\_\_ SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

LOCATION \_\_\_\_\_ CONTRACTOR \_\_\_\_\_ APPROVED BY \_\_\_\_\_ DATE \_\_\_\_\_